


PRESENTABLE COUNTER

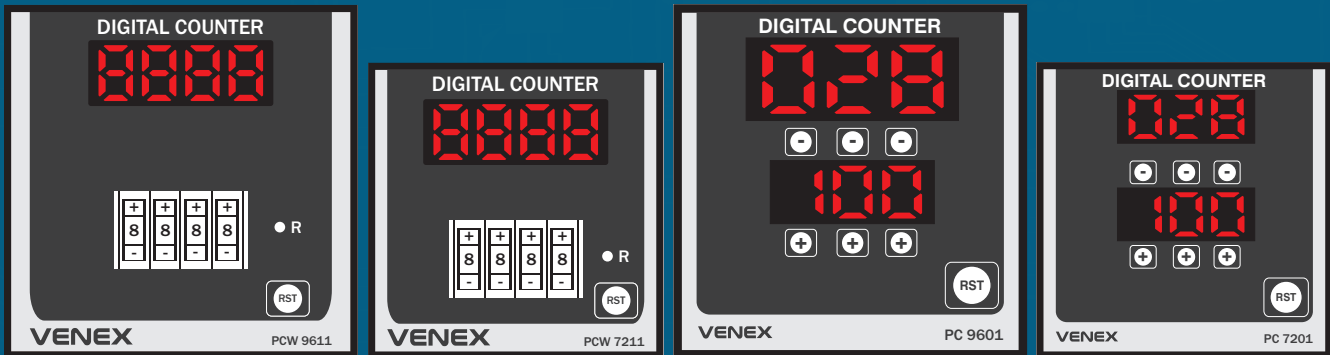

Model	PCW 9611	PCW 7211	PC 9601	PC 7201
Frame	96X96	72X72	96X96	72X72
Panel	92X92	68X68	92X92	68X68
Display	4 Digit 0.56" RED	4 Digit 0.39" RED	3 Digit 0.56" RED 3 Digit 0.36" RED	3 Digit 0.36" RED 3 Digit 0.36" RED

INPUT

Start Pulse

NPN / PNP Proxy / Micro Switch / Limit Switch (Configurable) OR
230V AC Pulse (Factory Set)

OUTPUT

Control Output
Relay Reating
SSR / Buzzer

1CO OR 2CO OR SSR (Factory Set)
1CO, 5 Amp., 230 Volt AC
12 V DC Approximately (Optional)

SPECIFICATIONS

Supply Voltage
Reset Facility
Memory Retention
Range
Enclosure Material
Operating Temperature
Relative Humidity

230v AC, $\pm 10\%$, 50Hz
Auto Reset / By Front Keypad & Back Reset
Non Volatile Memory
0 - 9999 Count
Polycarbonate + ABS Plastic
0°C - 55°C
Upto 95% RH Non Condensing