


3 LINE TEMPERATURE + AMPERE CONTROLLER

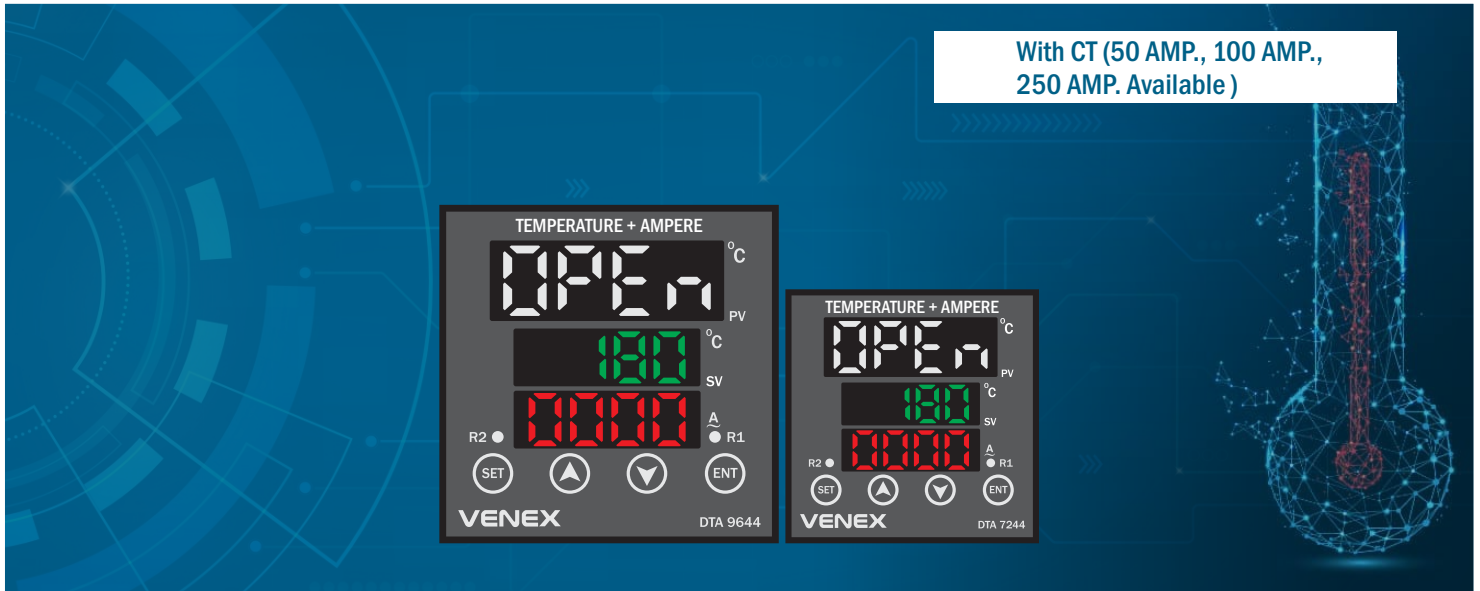

Model	DTA 9644	DTA 7244
Frame	96X96	72X72
Panel	92X92	68X68
Display	4 Digit 0.56" RED 4 Digit 0.39" GREEN	4 Digit 0.39" RED 4 Digit 0.29" GREEN

INPUT	Sensor	J / K OR RTD & RTD.1 2W/3W (Configurable) (Also Available in R/S/T/N/PT 1000)
	Range	J(0°C to 400°C & 0°C to (600°C), K(0°C to 1200°C), PT-100 2W/3W (0°C to 400°C, - 50.0°C to 200.0°C)
	CT Input	50A
OUTPUT	Control Output Capacity SSR	RELAY + SSR / RELAY + RELAY / RELAY + RELAY + SER (Factory Set) 1CO, 7 Amp., 230 Volt AC 12 V DC Approximately
SPECIFICATIONS	Supply Voltage Set Point Control Mode Operating Mode Accuracy Enclosure Material Operating Temperature Relative Humidity	230v AC, ±10%, 50Hz 1 Set Point / 2 Set Point Time Proportional / ON-OFF / PID (Configurable) HEATING / COOLING Mode ±1% of FSD Polycarbonate + ABS Plastic 0°C - 55°C Upto 95% RH Non Condensing