


3 PHASE SINGLE DISPLAY AMPERE CONTROLLER

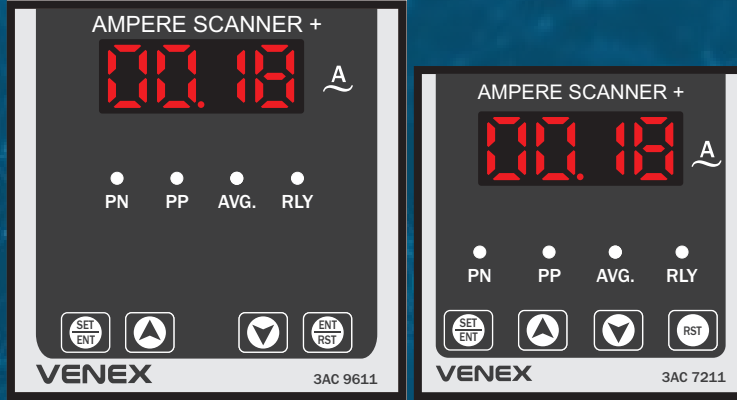

- Features :
- » Under Current and Over Current
 - » Current Unbalance
 - » Auto Reset
 - » 3 Phase Voltage Indication LED.
 - » Phase Lose

Model	3AC 9611	3AC 7211
Frame	96X96	72X72
Panel	62X62	68X68
Display	4 Digit 0.56" RED	4 Digit 0.56" RED

3AC 9611 | 3AC 7211

INPUT	Input	0 - 750 V AC OR UP TO 2000 / 5 CT Selection (Factory Set)
OUTPUT	Relay Rating	1CO, 5 Amp., 230 Volt AC (NO - C - NC)
SPECIFICATIONS	Supply Voltage Range Accuracy Enclosure Material Operating Temperature Relative Humidity	230v AC, ±10%, 50Hz 0 - 500V AC OR 0 - 500V DC (Factory Set) ±1% of FSD Polycarbonate + ABS Plastic 0°C - 55°C Upto 95% RH Non Condensing