


STAR DELTA PANEL PROTECTION CONTROLLER

Features :

- » Inbuilt Star Delta Timer
- » Inbuilt Auto Switch
- » Front Start Stop Button
- » Back Start, Stop, Push, Button Connection.
- » Auto / Manul Selection
- » 3 Relay 1st For Protection | 2st For Star | 3st For Deter
- » Auto Start Dulse Input (Like Compressor)

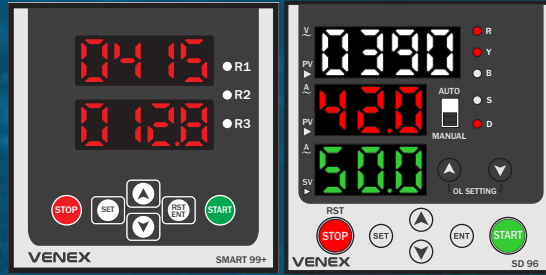

Features :

- » Star Delta Time & Inbuilt
- » Start-Stop External Connection Available
- » Over Load (Over Current)
- » Dry Run (Under Current)
- » SPP Protection
- » Auto Time
- » Delay Timer
- » Large Display
- » Easy to Set Over Load
- » High & Low Voltage
- » Phase Sequerse

Model	SMART 99+	SD 96
Frame	96X96	96X96
Panel	92X92	92X92
Display	4 Digit 0.56" RED Double Display	4 Digit 0.8" RED Double Display

INPUT		SPECIFICATIONS	
Volt Input	R, Y, B, Three Phase (10 VAC ~ 650 VAC)	AUX. Accuracy	415 VAC, 50Hz, ±10%
CT Input	2000 / 5 CT Selection And 50 Ampere CT @ 3 NOs (1.0 AMP ~ 50.0 AMP) & 100 Ampere CT @ 3 NOs (1 AMP ~ 100 AMP)	Operating Temperature	±1% of FSD 0°C ~ 55°C
DI Input	Start Input, Stop Input	Relative Humidity	Up to 95% RH Non Condensing
		Enclosure Material	Polycarbonate + ABS Plastic
OUTPUT			
Relay	3CO, Followed by Main, Start & Delta 7 Amp., 230 VAC		

