


PROCESS INDICATOR

0 - 10 & 4 - 20 MA

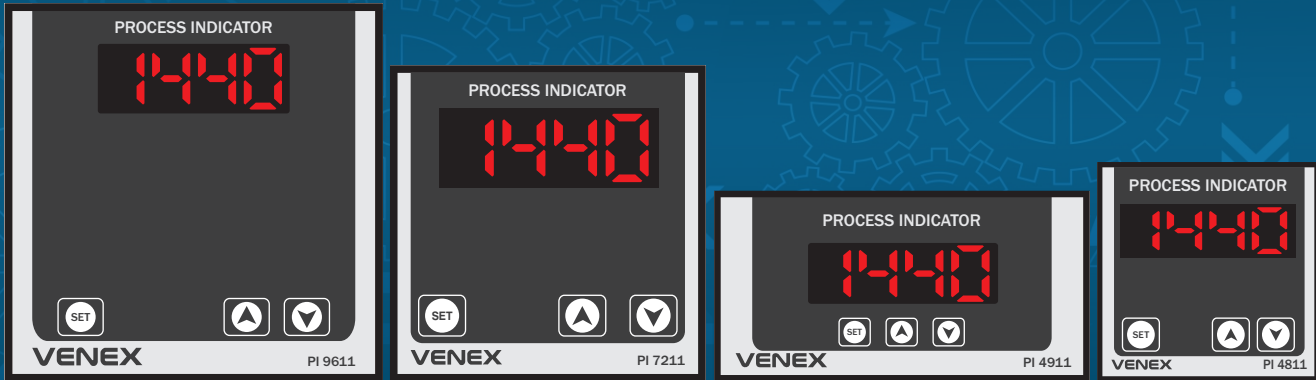

Model	PI 9611	PI 7211	PI 4911	PI 4811
Frame	96X96	72X72	48X96	48X48
Panel	92X92	68X68	44X92	44X44
Display	4 Digit 0.56" RED	4 Digit 0.56" RED	4 Digit 0.56" RED	4 Digit 0.39" RED

INPUT

Input

0 - 10V DC / 0 - 20 mA, 4 - 20 mA (Factory Set)

SPECIFICATIONS

Supply Voltage	230v AC, $\pm 10\%$, 50Hz
Range	- 999 - 2500 Count
Accuracy	$\pm 1\%$ of FSD
Enclosure Material	Polycarbonate + ABS Plastic
Operating Temperature	0°C - 55°C
Relative Humidity	Upto 95% RH Non Condensing
Indication	"H" Range For Maximum Count "L" Range For Maximum Count "DP" Decimal Point Selectable