

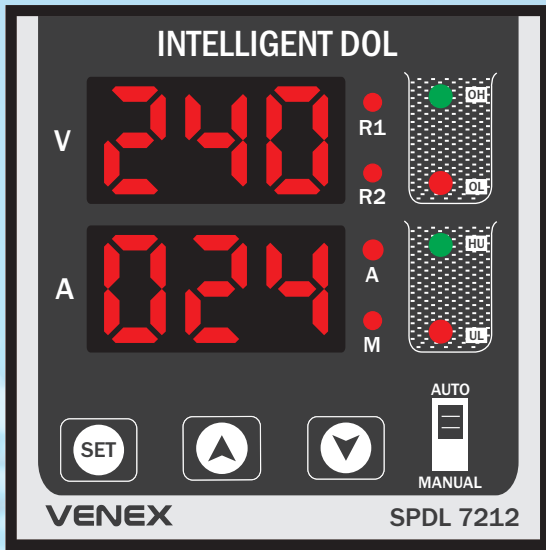


SINGLE PHASE WATER LEVEL PANEL CONTROLLER

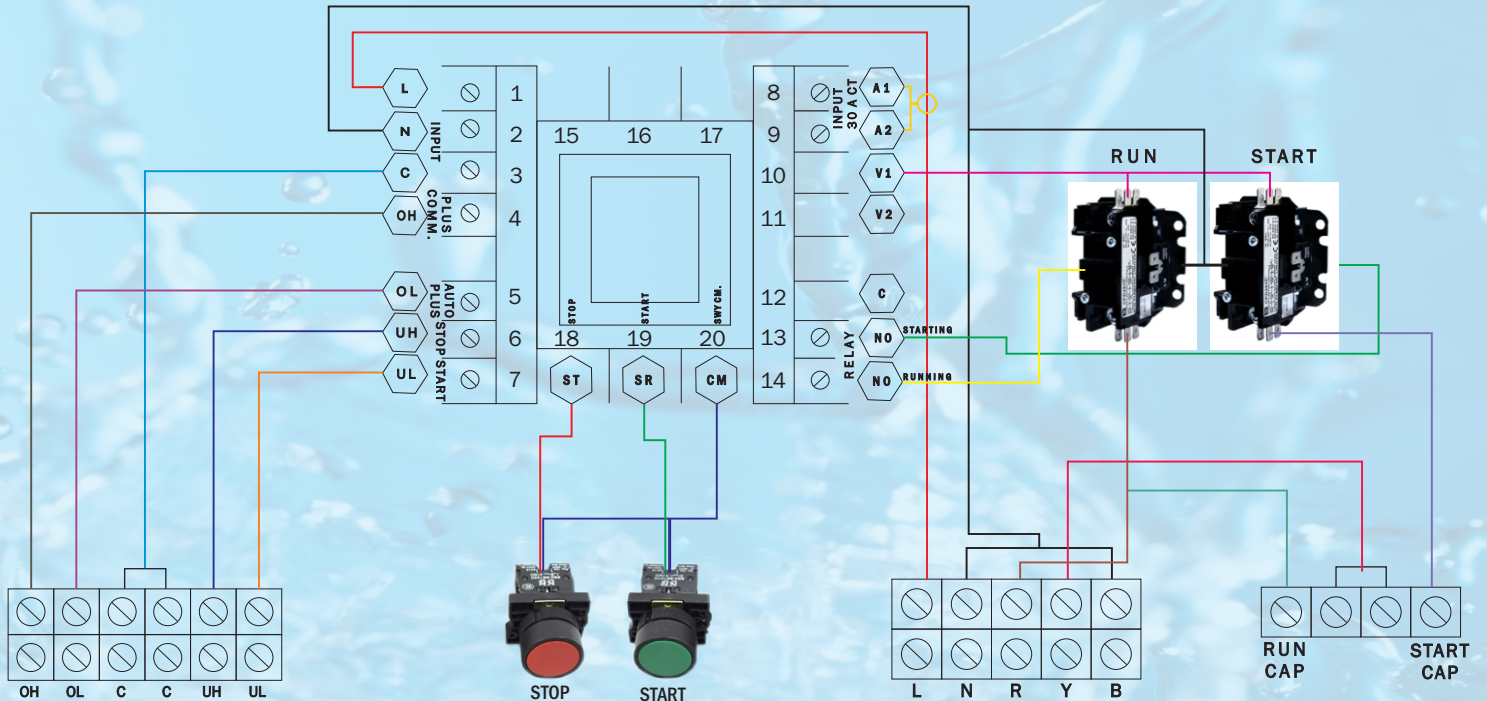

SPDL 7212

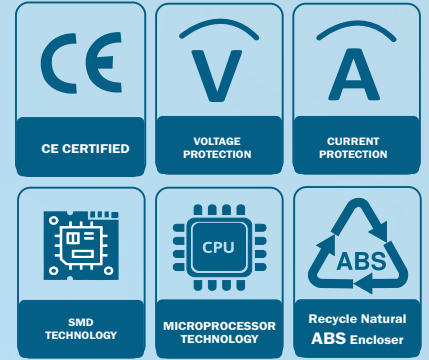

SPECIFICATION

AUX.
INPUT
OUTPUT
OPERATING TEMP.
RELATIVE HUMIDITY
ENCLOSURE MATERIAL

230 VAC, 50 Hz, $\pm 10\%$
 DUAL TANK WATER LEVEL INPUT (OH, OL, C, UH, UL) START - STOP Terminal.
 2 Relay (1 For Starting 2nd For Running) (Reply 7 AMP), Resistive Load
 0°C ~ 55°C
 UP to 95% RH Non Condensing
 Polycarbonate + ABS Plastic