


INTELLIGENT DOL

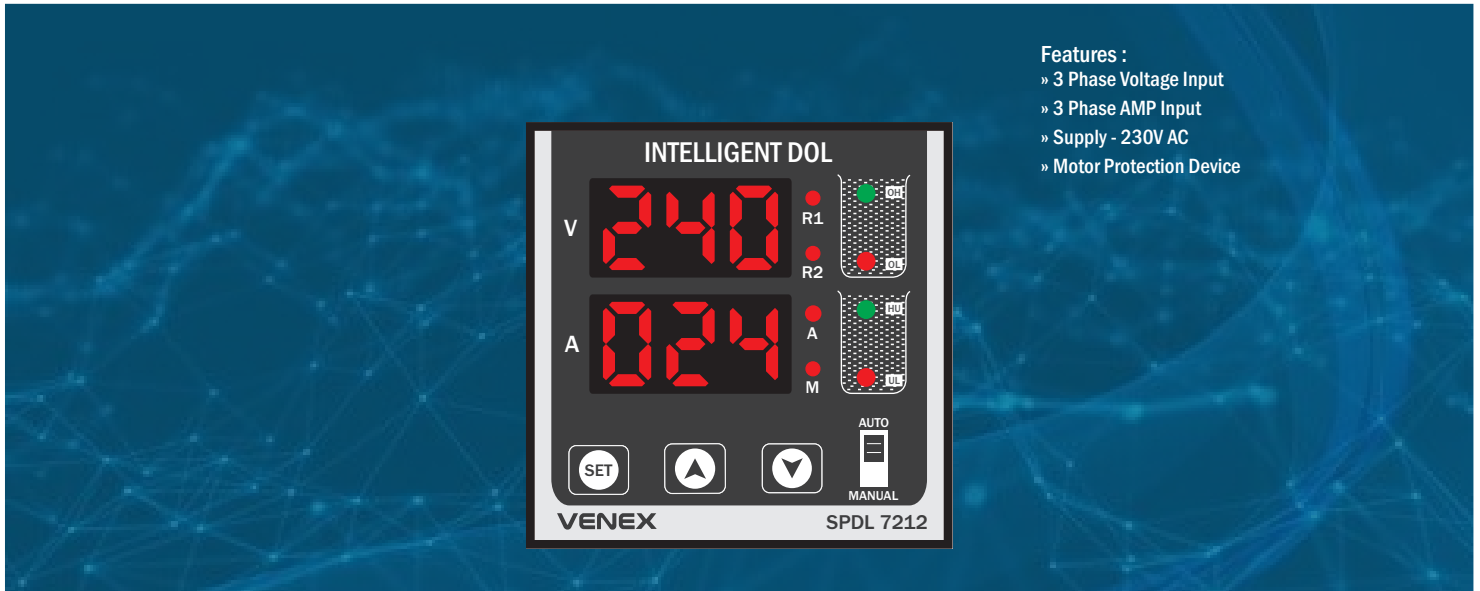

- Features :
- » 3 Phase Voltage Input
  - » 3 Phase AMP Input
  - » Supply - 230V AC
  - » Motor Protection Device

Model	SPDL 7212
Frame	72X72
Panel	68X68
Display	3+3 Digit 0.39" RED

<b>INPUT</b>	Input	Dual Tank Water Level Input (OH, OL, C, UH, UL) START - STOP Terminal.
<b>OUTPUT</b>	Output	2 Relay (1 For Starting 2nd For Running) (Reply 7 AMP), Resistive Load
<b>SPECIFICATIONS</b>	AUX. Operating Temperature Relative Humidity Enclosure Material	230 V AC, 50Hz, ±10% 0°C ~ 55°C Upto 95% RH Non Condensing Polycarbonate + ABS Plastic