


AMPERE + HOUR METER

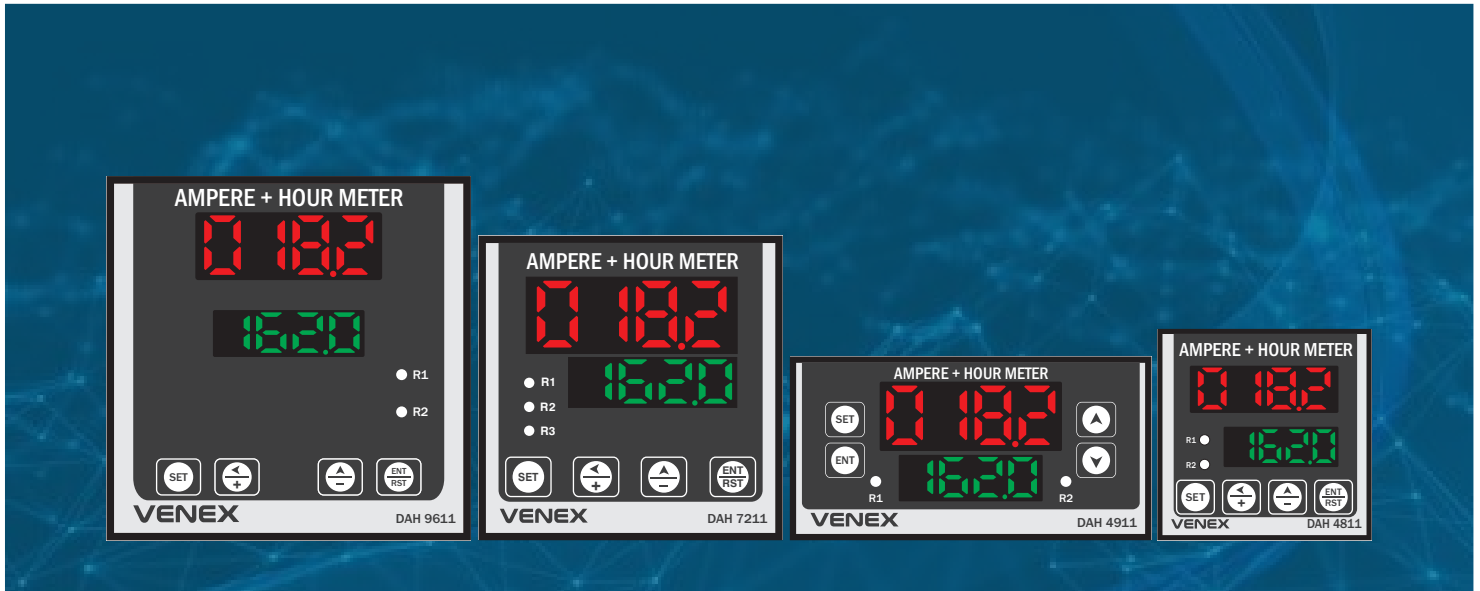

Model	DAH 9611	DAH 7211	DAH 4911	DAH 4811
Frame	96X96	72X72	48X96	48X48
Panel	92X92	68X68	44X92	44X44
Display	4 Digit 0.56" RED 4 Digit 0.39" GREEN	4 Digit 0.56" RED 4 Digit 0.39" GREEN	4 Digit 0.56" RED 4 Digit 0.39" GREEN	4 Digit 0.36" RED 4 Digit 0.28" GREEN

INPUT	AC Input (Amp.) DC Input (Volt)	0 - 5 AMP AC Direct OR UP TO 2000/5 CT Selection 75 M V shunt
OUTPUT	Control Output Relay Rating	1CO (1 Relay) 1CO, 7 Amp, 230 Volt AC
SPECIFICATIONS	Supply Voltage Accuracy Enclosure Material Operating Temperature Relative Humidity	230v AC, ±10%, 50Hz ±1% of FSD Polycarbonate + ABS Plastic 0°C - 55°C Upto 95% RH Non Condensing
Note		30 A AC / 50 A AC Direct CT Available
Note		Relay Output As Per Requirement Available