


JUMBO DOUBLE DISPLAY TEMPERATURE CONTROLLER

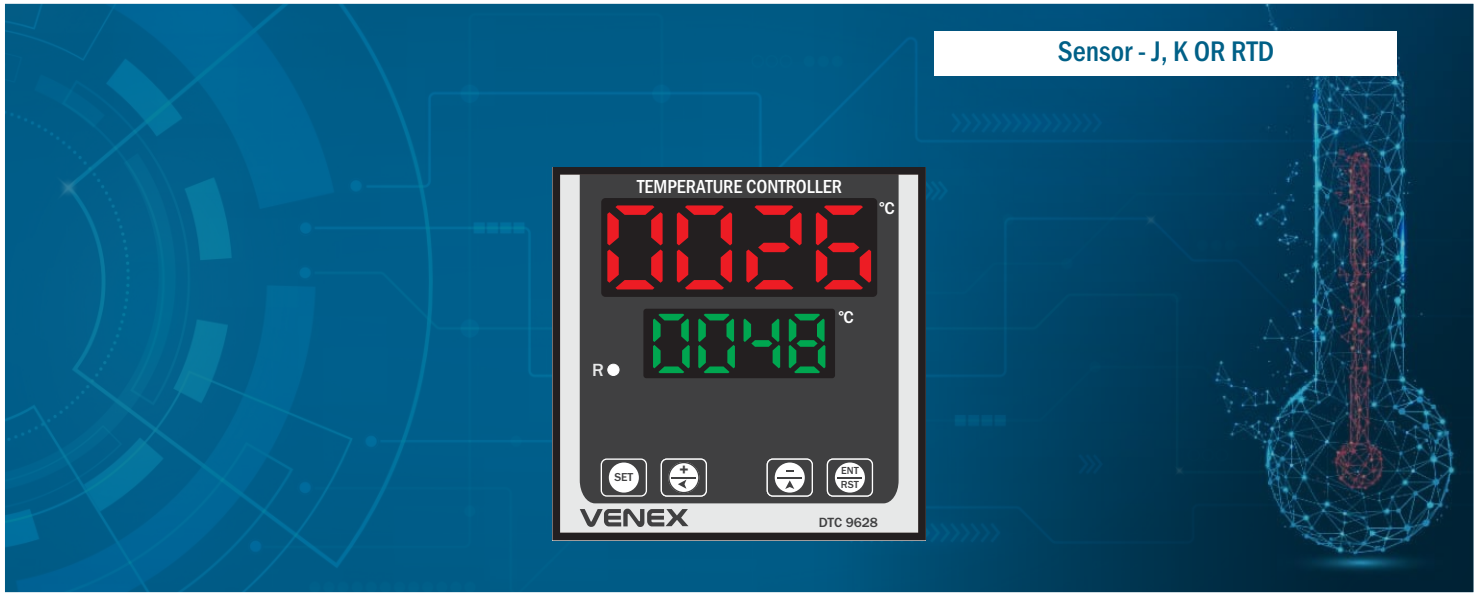

Model	DTC 9628
Frame	96X86
Panel	92X92
Display	4 Digit 0.80" RED 4 Digit 0.56" GREEN

INPUT	<p>Sensor J & K OR RTD & RTD.1 2W/3W (Configurable) (Also available in R/S/T/N/PT 1000)</p> <p>Range J(0°C to 400°C & 0°C to (600°C, K(0°C to 1200°C), PT-100 2W/3W(0°C to 400°C, - 50.0°C to 200.0°C)</p>
OUTPUT	<p>Control Output Capacity SSR RELAY + RELAY+ SSR (Relay + SSR (Heat) + Relay (Cool)) 1CO, 7 Amp, 230 Volt AC 12 V DC Approximately</p>
SPECIFICATIONS	<p>Supply Voltage 230v AC, ±10%, 50Hz</p> <p>Set Point 2 Set Point</p> <p>Control Mode Time Proportional / ON-OFF / PID (Configurable)</p> <p>Operating Mode HEAT / COOL Mode Slectable</p> <p>Accuracy ±1% of FSD</p> <p>Enclosure Material Polycarbonate + ABS Plastic</p> <p>Operating Temperature 0°C - 55°C</p> <p>Relative Humidity Upto 95% RH Non Condensing</p>