


SEQUENTIAL TIMER

16X2 LCD Display



10 to 20 CHANEL SEQUENTIAL TIMER

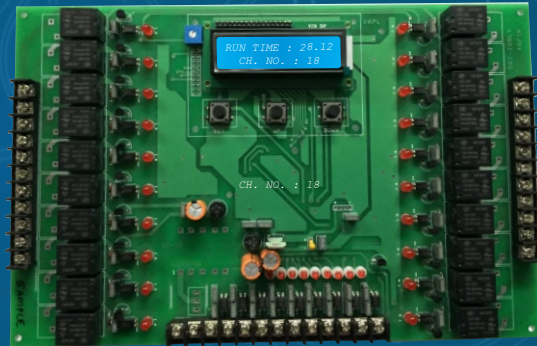

Size : 180 x 280 mm

SETTING

Set Point Range Setting
16 Set Point (8 to 16 Available)
99.99 Sec. / 999.9 Sec. / 99.59 Min. / 999.9 Min. / 99.59 Hrs. / 999.9 Hrs. (Configurable)

SETTING

Set Point Range Setting
20 Set Point
99.99 Sec. / 999.9 Sec. / 99.59 Min. / 999.9 Min. / 99.59 Hrs. / 999.9 Hrs. (Configurable)

OUTPUT

Control Output
16 Relay/ 1CO 5 Amp. @ (resistive load)230V AC ot 12V max 20mA DC SSR Output (Any one Factory Set)

OUTPUT

Control Output
20 Relay/ 1CO 7 Amp. @ (resistive load)230V AC ot 12V max 20mA DC SSR Output (Any one Factory Set)

INPUT

Control Input
4 Pulse (Micro Switch / Proximity) Input Available (Back Start/ Stop)
Cascading
1 + 3 parallal

INPUT

Control Input
9 Pulse (Micro Switch / Proximity) Input Available (Any one Factory Set)

SPECIFICATIONS

Supply Voltage	230v AC, ±10%, 50Hz
Operating Mode	Delayed ON / Delay OFF / Cycle Mode (Configurable)
Count Direction	UP / Down (Configurable)
Memory Retention	YES / NO (Configurable)
Reset	Front & Back Both Reset Available