


## HUMIDITY + TEMPERATURE CONTROLLER

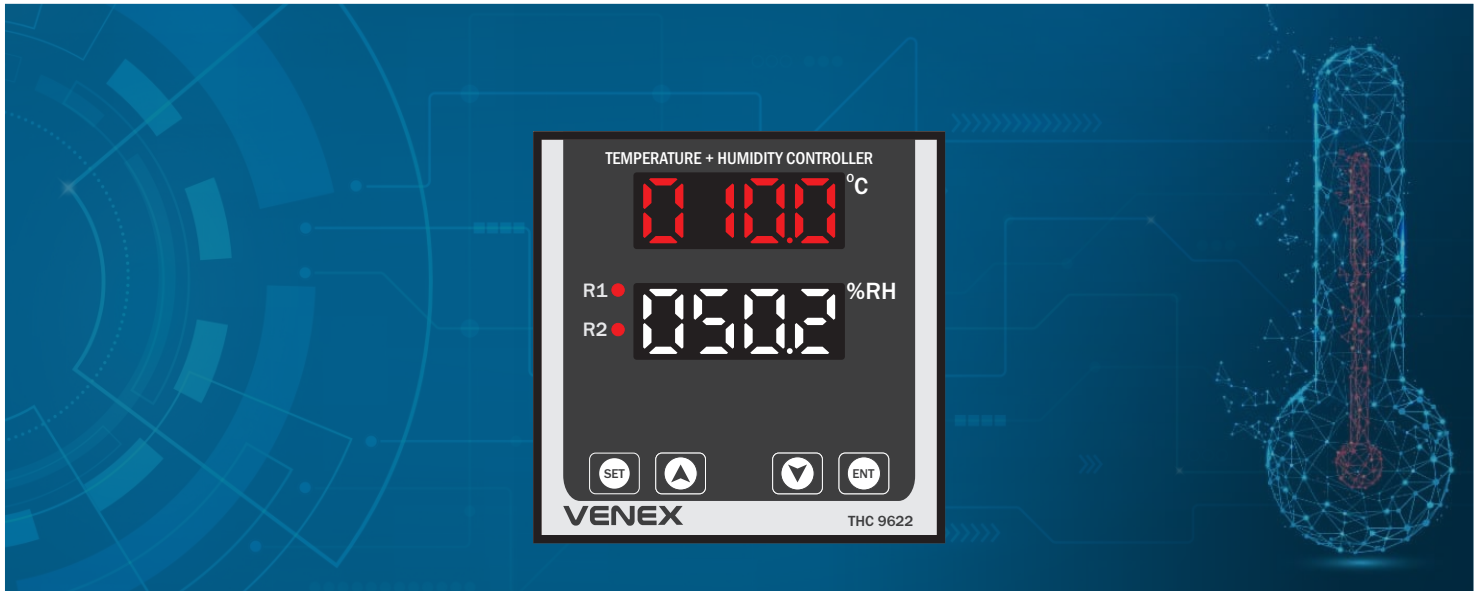

Model	THC 9622
Frame	96X96
Panel	92X92
Display	4 Digit 0.56" RED 4 Digit 0.39" WHITE

<b>INPUT</b>	Sensor	PT 100 (RTD   RTD.1) + Humidity Sensor
	Range	20% to 90% RH or 0.0 to 5.0 VDC.
<b>OUTPUT</b>	Capacity	1CO + 1CO, 7 Amp., 230 VAC (NO - C - NC)
	<b>SPECIFICATIONS</b>	
Power Supply	90~285V AC, 50~60 Hz,	
Power Consumption	<5w	
Working Environment	Temperature: - 10°C~60°C Humidity: <80%RH	
Storage Environment	Temperature: - 20°C~70°C Humidity: <90%RH	
Measuring Range	0.0°C to 400°C or -50.0°C to 199.9°C, Humidity: 20.0%~90.0%RH	
Measuring Accuracy	Temperature: ±1%, Humidity: ±5%	
Dielectric Strength	1600V AC (1 Min.)	
Dimension(mm)	96W x 96H x 55L	