


PROGRAMMABLE UNIVERSAL TIMER

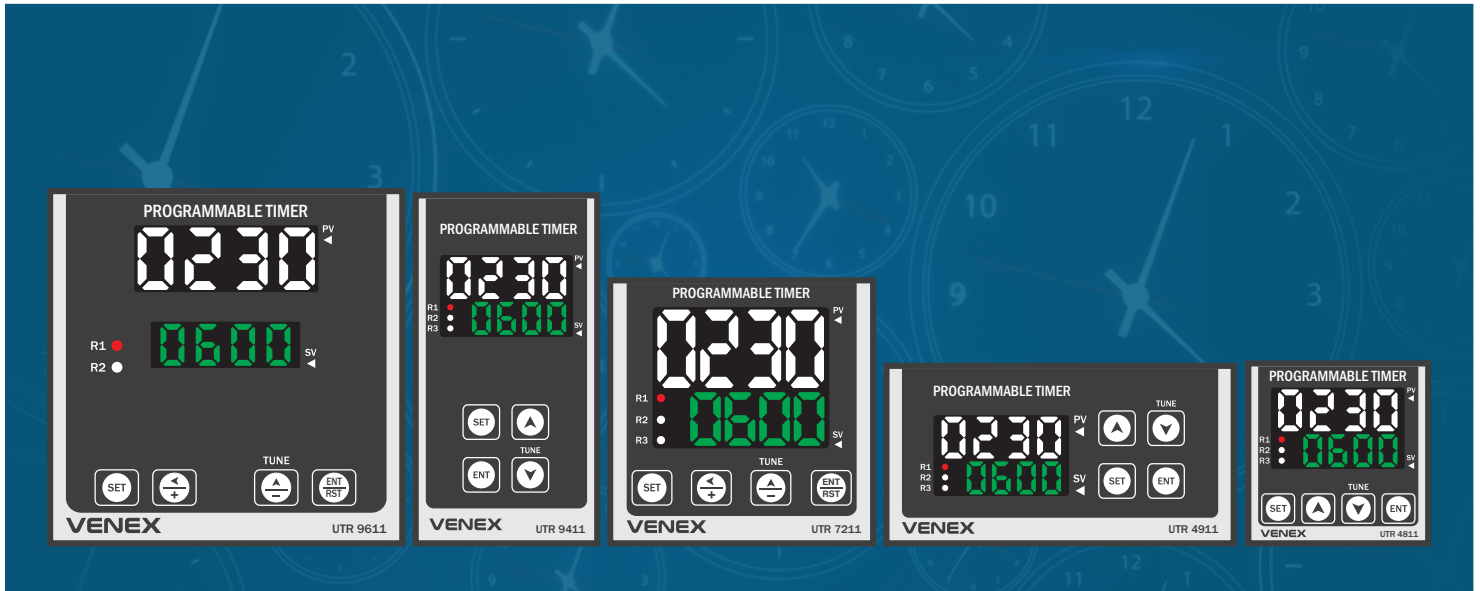

Model	UTR 9611	UTR 9411	UTR 7211	UTR 4911	UTR 4811
Frame	96X96	96X48	72X72	48X96	48X48
Panel	92X92	92X44	68X68	44X92	44X44
Display	4 Digit 0.56" RED 4 Digit 0.39" GREEN	4 Digit 0.39" RED 4 Digit 0.39" GREEN	4 Digit 0.56" RED 4 Digit 0.39" GREEN	4 Digit 0.56" RED 4 Digit 0.28" GREEN	4 Digit 0.39" RED 4 Digit 0.28" GREEN

SETTING Set Point Counting Direction Range Setting	1 Set Point For Delayed ON / Instant ON OR 2 Set Point For Cycle Mode Up / Down (Configurable) 99.99 / 999.9 / 9999 Sec. / Min. / Hrs. (Configurable)
INPUT Start Pulse Start Pulse Type	Micro Switch / Limit Switch / Proximity Power ON / Enable / Trigger
OUTPUT Control Output Relay Rating SSR / Buzzer	1CO OR 2CO OR SSR (Factory Set) 1CO, 7 Amp., 230 Volt AC 12 V DC Approximately
SPECIFICATIONS Supply Voltage Reset Facility Memory Retention Operating Mode Enclosure Material Operating Temperature Relative Humidity	230v AC, ±10%, 50Hz By Front Keypad & Back Reset YES / NO (Configurable) Delayed ON / Instant ON / Cycle Mode (Configurable) Polycarbonate + ABS Plastic 0°C - 55°C Upto 95% RH Non Condensing