


DOUBLE DISPLAY TEMPERATURE CONTROLLER

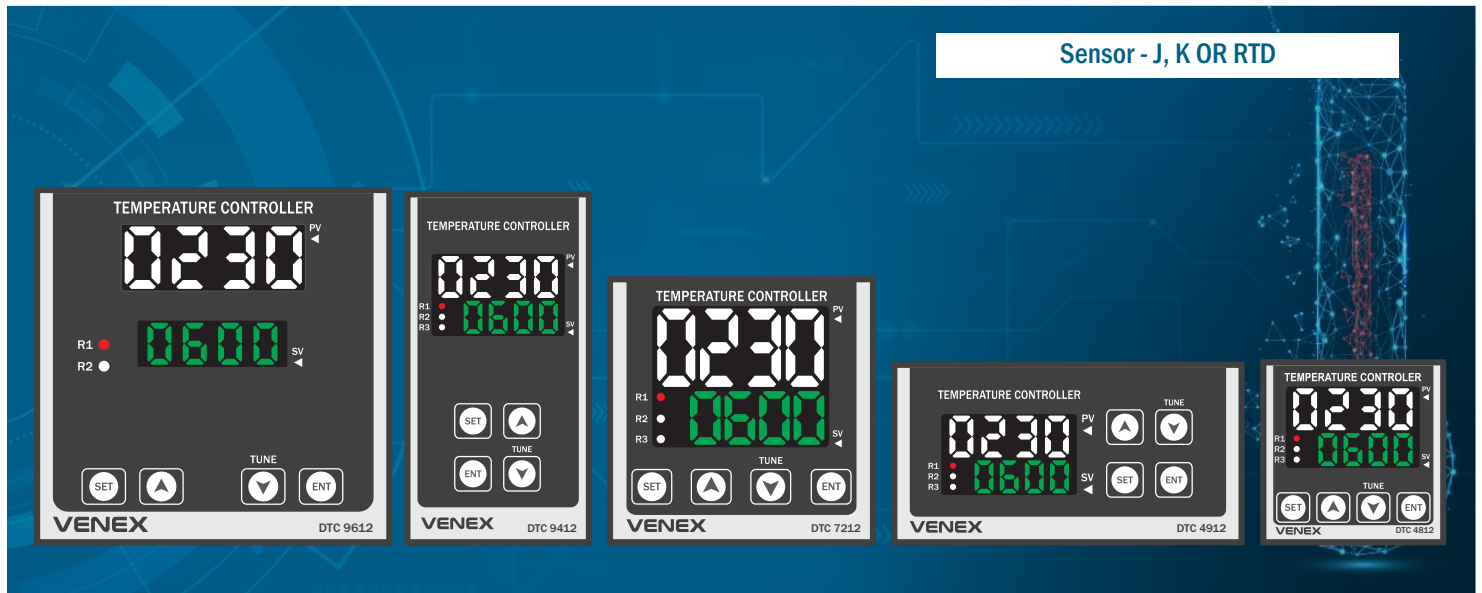

Model	DTC 9612	DTC 9412	DTC 7212	DTC 4912	DTC 4812
Frame	96X96	96X48	72X72	98X96	48X48
Panel	92X92	92X44	68X68	44X92	44X44
Display	4 Digit 0.56" RED 4 Digit 0.39" GREEN	4 Digit 0.39" RED 4 Digit 0.29" GREEN	4 Digit 0.56" RED 4 Digit 0.39" GREEN	4 Digit 0.56" RED 4 Digit 0.39" GREEN	4 Digit 0.39" RED 4 Digit 0.29" GREEN

INPUT	Sensor	J & K OR RTD & RTD.1 2W/3W (Configurable) (Also available in R/S/T/N/PT 1000)
	Range	J(0°C to 400°C & 0°C to (600°C, K(0°C to 1200°C), PT-100 2W/3W(0°C to 400°C, - 50.0°C to 200.0°C)

OUTPUT	Control Output Capacity SSR	RELAY + RELAY+ SSR (Relay + SSR (Heat) + Relay (Cool)) 1CO + 1CO, 7 Amp, 230 Volt AC 12 V DC Approximately
---------------	-----------------------------------	--

SPECIFICATIONS	Supply Voltage Set Point Control Mode Operating Mode Accuracy Enclosure Material Operating Temperature Relative Humidity	230v AC, ±10%, 50Hz 2 Set Point Time Proportional / ON-OFF / PID (Configurable) HEAT / COOL Mode Slectable ±1% of FSD Polycarbonate + ABS Plastic 0°C - 55°C Upto 95% RH Non Condensing
-----------------------	---	--

Note	Sensor Type R, S, T, E, B Available
------	-------------------------------------