


3 PHASE SINGLE DISPLAY VOLT CONTROLLER

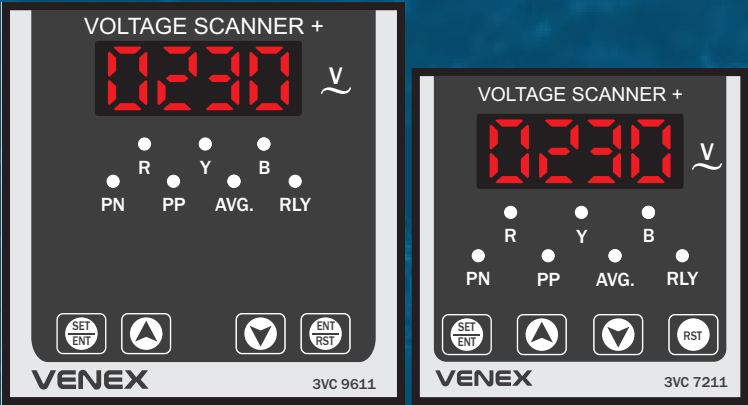

- Features :
- » Under Voltage and Over Voltage
 - » Phase Unbalance
 - » Phase Lose
 - » 3 Phase Voltage Indication LED.
 - » Auto Reset
 - » Phase Sequence

Model	3VC 9611	3VC 7211
Frame	96X96	72x72
Panel	62x62	68x68
Display	4 Digit 0.56" RED	4 Digit 0.56" RED

3VC 9611 | 3VC 7211

INPUT	Input	50 - 600 V AC OR 300 V AC Phase to Neurral.
OUTPUT	Relay Ratting	IEO, 5 Amp., 230 Volt AC (NO - C - NC)
SPECIFICATIONS	Supply Voltage Range Accuracy Enclosure Material Operating Temperature Relative Humidity	230v AC, ±10%, 50Hz 0 - 500V AC OR 0 - 500V DC (Factory Set) ±1% of FSD Polycarbonate + ABS Plastic 0°C - 55°C Upto 95% RH Non Condensing